


EXT.25T

MACROM

42 mm Tweeter

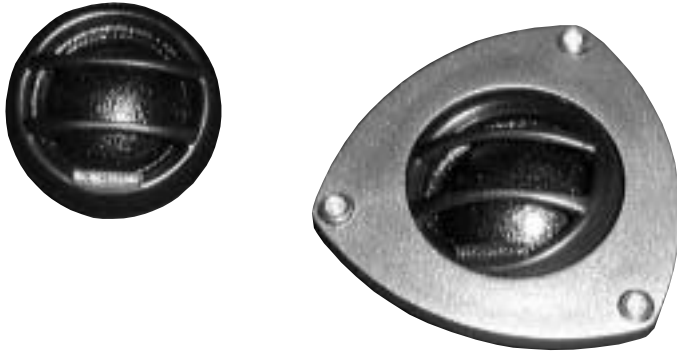

SPECIFICATIONS

Max Power :	100 W
Frequency response :	2,5 kHz - 22 kHz
Sensitivity :	91 dB
Woofer impedance	4 Ω
Coil diameter :	25 mm
External diameter :	42 mm
Installation depth :	10 mm
Fs :	1700 Hz

- **LARGE 32MM VOICE COIL**
For high energy and wide response
- **LOW RESONANT FREQUENCY : 1700Hz**
Like that it will be easy to make a passive x-over
- **NEODYMIUM MAGNET**
For more magnetic flux in the air gap, it means more details, more sensitivity, and more power handling
- **HAND TREATED SOFT DOME**
For great sounding and softness
- **ORIENTABLE TWEETER**
For an easy tuning of the sound stage
- **MULTI MOUNTING KIT**
Everything is included ! You can install the tweeter built-in, in surface or inclined, with or without the chamber
- **FERROFLUID COOLED TWEETER**
For better heat dissipation and more power handling
- **100W MAXIMUM POWER**
No problem in most installations